



Series description: Wilo-CronoBloc-BL

Wilo-CronoBloc-BL

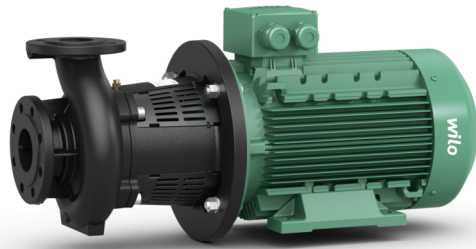

CronoBloc-BL

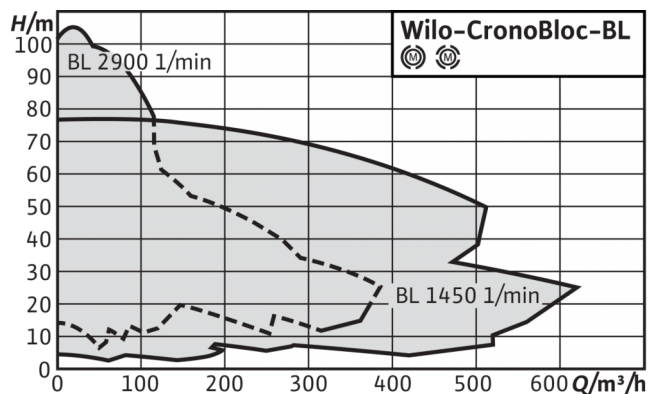

The legal requirements and regulations pertaining to drinking water are becoming ever more stringent, especially in highly-developed countries. Increasing demands are therefore being placed on the materials in the pumps and systems that are used. At the same time, global megatrends such as urbanisation are escalating the need to rely on ever more efficient systems. The Wilo-CronoBloc is our solution due to its high efficiency and drinking water approval.

Design type

Glanded pump in block design with flange connection

Application

For pumping heating water (in accordance with VDI 2035), water-glycol mixtures, cooling water and cold water without abrasive substances in heating, cold water and cooling water systems.

Scope of delivery

- Pump
- Installation and operating instructions

Type key

Example	BL 40/160-4/2
BL	Monobloc pump
40	Nominal diameter DN of the pipe connection (pressure port)
160	Nominal impeller diameter
4	Rated power P2 in kW
2	Number of poles

Technical data

- Permissible temperature range of -20 °C to +140 °C
- Mains connection 3~400 V, 50 Hz (others on request)
- Protection class IP55
- Nominal diameter DN 32 to DN 150
- Max. operating pressure 16 bar (optionally 25 bar on request)

Materials

- Pump housing and lantern: Standard: EN-GJL-250; optional: Spheroidal cast iron EN-GJS-400-18-LT (depending on type)
- Impeller: Standard: EN-GJL-200; special version: Bronze CuSn 10 stainless steel 1.4408 (depending on type)
- Shaft: 1.4122
- Mechanical seal: AQEGG; other mechanical seals on request

Description/construction

<TEXT> <P>Single-stage low-pressure centrifugal pump in monobloc design, with axial suction port and radially arranged pressure port with </P> <P level="1">Mechanical seal </P> <P level="1">Flange connection with pressure measuring connection R </P> ¹</P> <P level="1">Lantern</P> <P level="1">Coupling </P> <P level="1">IEC standard motor </P> </TEXT>

Special features/product advantages

- Energy-efficient due to state-of-the-art pump hydraulics and the use of IE3 motors
- Cathaphoretic coating of all cast iron components ensures high resistance to corrosion and long service life
- Universal use in diverse applications thanks to different impeller materials, several motor options as well as different mechanical seals
- Easy installation due to standard pump support feet and optional supporting blocks
- Easy maintenance and user-friendly design with optional "back pull-out" design and cartridge mechanical seal for large pump types

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 32/140-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	DN 32	59.0 kg	2121125
CronoBloc-BL 32/150-3/2	3~400 V, 50 Hz	IE3	3.00 kW	DN 32	62.0 kg	2121126
CronoBloc-BL 32/160-4/2	3~400 V, 50 Hz	IE3	4.00 kW	DN 32	70.0 kg	2121127
CronoBloc-BL 32/170-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	DN 32	95.0 kg	2121128
CronoBloc-BL 32/210-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	DN 32	106.5 kg	2121129
CronoBloc-BL 32/220-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 32	179.0 kg	2121130
CronoBloc-BL 40/110-1,5/2	3~400 V, 50 Hz	IE3	1.50 kW	DN 40	52.0 kg	2121131
CronoBloc-BL 40/120-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	DN 40	55.0 kg	2121132
CronoBloc-BL 40/130-3/2	3~400 V, 50 Hz	IE3	3.00 kW	DN 40	56.0 kg	2121133
CronoBloc-BL 40/140-3/2	3~400 V, 50 Hz	IE3	3.00 kW	DN 40	59.0 kg	2121134
CronoBloc-BL 40/140-4/2	3~400 V, 50 Hz	IE3	4.00 kW	DN 40	67.0 kg	2121135
CronoBloc-BL 40/160-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	DN 40	97.0 kg	2121136
CronoBloc-BL 40/170-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	DN 40	97.0 kg	2121137
CronoBloc-BL 40/170-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	DN 40	100.5 kg	2121138
CronoBloc-BL 40/180-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	DN 40	110.5 kg	2121139
CronoBloc-BL 40/210-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 40	182.0 kg	2121140
CronoBloc-BL 40/220-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 40	182.0 kg	2121141
CronoBloc-BL 40/220-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 40	190.0 kg	2121142
CronoBloc-BL 50/110-3/2	3~400 V, 50 Hz	IE3	3.00 kW	DN 50	62.0 kg	2121146
CronoBloc-BL 50/120-3/2	3~400 V, 50 Hz	IE3	3.00 kW	DN 50	62.0 kg	2121147
CronoBloc-BL 50/120-4/2	3~400 V, 50 Hz	IE3	4.00 kW	DN 50	70.0 kg	2121148
CronoBloc-BL 50/130-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	DN 50	92.0 kg	2121149
CronoBloc-BL 50/140-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	DN 50	92.0 kg	2121150

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 50/140-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	DN 50	95.5 kg	2121151
CronoBloc-BL 50/150-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	DN 50	100.0 kg	2121152
CronoBloc-BL 50/150-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	DN 50	103.5 kg	2121153
CronoBloc-BL 50/170-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 50	167.0 kg	2121154
CronoBloc-BL 50/200-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 50	184.0 kg	2121155
CronoBloc-BL 50/200-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 50	191.0 kg	2121156
CronoBloc-BL 50/210-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 50	191.0 kg	2121157
CronoBloc-BL 50/210-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	DN 50	195.0 kg	2121158
CronoBloc-BL 50/220-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	DN 50	195.0 kg	2121159
CronoBloc-BL 50/220-22/2	3~400 V, 50 Hz	IE3	22.00 kW	DN 50	225.0 kg	2121160
CronoBloc-BL 50/240-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 50	290.0 kg	2121161
CronoBloc-BL 50/260-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 50	290.0 kg	2121162
CronoBloc-BL 50/260-37/2	3~400 V, 50 Hz	IE3	37.00 kW	DN 50	319.0 kg	2121163
CronoBloc-BL 65/120-4/2	3~400 V, 50 Hz	IE3	4.00 kW	DN 65	75.0 kg	2121164
CronoBloc-BL 65/130-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	DN 65	97.0 kg	2121165
CronoBloc-BL 65/140-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	DN 65	100.5 kg	2121166
CronoBloc-BL 65/160-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 65	173.0 kg	2121167
CronoBloc-BL 65/170-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 65	173.0 kg	2121168
CronoBloc-BL 65/170-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 65	180.0 kg	2121169
CronoBloc-BL 65/190-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 65	197.0 kg	2121170
CronoBloc-BL 65/190-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	DN 65	201.0 kg	2121171
CronoBloc-BL 65/210-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	DN 65	201.0 kg	2121172
CronoBloc-BL 65/210-22/2	3~400 V, 50 Hz	IE3	22.00 kW	DN 65	234.0 kg	2121173

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 65/220-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 65	280.0 kg	2121174
CronoBloc-BL 80/145-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 80	183.0 kg	2121175
CronoBloc-BL 80/150-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 80	190.0 kg	2121176
CronoBloc-BL 80/160-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 80	190.0 kg	2121177
CronoBloc-BL 80/160-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	DN 80	194.0 kg	2121178
CronoBloc-BL 80/165-22/2	3~400 V, 50 Hz	IE3	22.00 kW	DN 80	224.0 kg	2121179
CronoBloc-BL 80/170-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 80	275.0 kg	2121180
CronoBloc-BL 80/200-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 80	293.0 kg	2121181
CronoBloc-BL 80/210-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 80	293.0 kg	2121182
CronoBloc-BL 80/210-37/2	3~400 V, 50 Hz	IE3	37.00 kW	DN 80	322.0 kg	2121183
CronoBloc-BL 100/145-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 100	203.0 kg	2121184
CronoBloc-BL 100/150-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	DN 100	207.0 kg	2121185
CronoBloc-BL 100/160-22/2	3~400 V, 50 Hz	IE3	22.00 kW	DN 100	237.0 kg	2121186
CronoBloc-BL 100/165-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 100	283.0 kg	2121187
CronoBloc-BL 100/170-37/2	3~400 V, 50 Hz	IE3	37.00 kW	DN 100	312.0 kg	2121188
CronoBloc-BL 40/230-15/2	3~400 V, 50 Hz	IE3	15.00 kW	DN 50	202.0 kg	2142015
CronoBloc-BL 40/230-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	DN 50	206.0 kg	2142016
CronoBloc-BL 40/240-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	DN 50	206.0 kg	2142017
CronoBloc-BL 40/240-22/2	3~400 V, 50 Hz	IE3	22.00 kW	DN 50	235.0 kg	2142018
CronoBloc-BL 40/245-22/2	3~400 V, 50 Hz	IE3	22.00 kW	DN 50	235.0 kg	2142019
CronoBloc-BL 40/245-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 50	291.0 kg	2142020
CronoBloc-BL 40/260-22/2	3~400 V, 50 Hz	IE3	22.00 kW	DN 50	235.0 kg	2142021
CronoBloc-BL 40/260-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 50	291.0 kg	2142022

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 150/250-200/2	3~400 V, 50 Hz	IE3	200.00 kW	DN 150	1649.0 kg	2151509
CronoBloc-BL 150/240-160/2	3~400 V, 50 Hz	IE3	160.00 kW	DN 150	1374.0 kg	2151510
CronoBloc-BL 150/230-132/2	3~400 V, 50 Hz	IE3	132.00 kW	DN 150	1352.0 kg	2151511
CronoBloc-BL 150/220-110/2	3~400 V, 50 Hz	IE3	110.00 kW	DN 150	1301.0 kg	2151512
CronoBloc-BL 150/210-90/2	3~400 V, 50 Hz	IE3	90.00 kW	DN 150	795.0 kg	2151513
CronoBloc-BL 125/250-160/2	3~400 V, 50 Hz	IE3	160.00 kW	DN 125	1343.0 kg	2160701
CronoBloc-BL 125/240-132/2	3~400 V, 50 Hz	IE3	132.00 kW	DN 125	1295.0 kg	2160702
CronoBloc-BL 125/230-110/2	3~400 V, 50 Hz	IE3	110.00 kW	DN 125	1245.0 kg	2160703
CronoBloc-BL 125/220-90/2	3~400 V, 50 Hz	IE3	90.00 kW	DN 125	786.0 kg	2160704
CronoBloc-BL 125/210-75/2	3~400 V, 50 Hz	IE3	75.00 kW	DN 125	788.0 kg	2160705
CronoBloc-BL 32/250.1-11/2	3~400 V, 50 Hz	IE3	11.00 kW	DN 32	200.0 kg	9126721
CronoBloc-BL 32/240.1-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	DN 32	138.0 kg	9126723
CronoBloc-BL 32/230.1-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	DN 32	135.0 kg	9126724
CronoBloc-BL 32/125-4/2	3~400 V, 50 Hz	IE3	4.00 kW	DN 32	84.0 kg	9126726
CronoBloc-BL 32/115-3/2	3~400 V, 50 Hz	IE3	3.00 kW	DN 32	77.0 kg	9126727
CronoBloc-BL 32/105-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	DN 32	73.0 kg	9126728
CronoBloc-BL 32/95-1,5/2	3~400 V, 50 Hz	IE3	1.50 kW	DN 32	70.0 kg	9126729
CronoBloc-BL 32/85-1,1/2	3~400 V, 50 Hz	IE3	1.10 kW	DN 32	62.0 kg	9126730
CronoBloc-BL 100/200-75/2	3~400 V, 50 Hz	IE3	75.00 kW	DN 100	668.0 kg	9139900
CronoBloc-BL 100/190-55/2	3~400 V, 50 Hz	IE3	55.00 kW	DN 100	518.0 kg	9139901
CronoBloc-BL 100/180-45/2	3~400 V, 50 Hz	IE3	45.00 kW	DN 100	464.0 kg	9139902
CronoBloc-BL 100/175-37/2	3~400 V, 50 Hz	IE3	37.00 kW	DN 100	420.0 kg	9139903
CronoBloc-BL 100/160-30/2	3~400 V, 50 Hz	IE3	30.00 kW	DN 100	392.0 kg	9139904

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 100/250-132/2	3~400 V, 50 Hz	IE3	132.00 kW	DN 100	1281.0 kg	9139906
CronoBloc-BL 100/240-110/2	3~400 V, 50 Hz	IE3	110.00 kW	DN 100	1230.0 kg	9139907
CronoBloc-BL 100/230-90/2	3~400 V, 50 Hz	IE3	90.00 kW	DN 100	746.0 kg	9139908
CronoBloc-BL 100/220-75/2	3~400 V, 50 Hz	IE3	75.00 kW	DN 100	771.0 kg	9139909
CronoBloc-BL 100/210-55/2	3~400 V, 50 Hz	IE3	55.00 kW	DN 100	562.0 kg	9139910
CronoBloc-BL 125/200-90/2	3~400 V, 50 Hz	IE3	90.00 kW	DN 125	686.0 kg	9139911
CronoBloc-BL 125/190-75/2	3~400 V, 50 Hz	IE3	75.00 kW	DN 125	686.0 kg	9139912
CronoBloc-BL 125/180-55/2	3~400 V, 50 Hz	IE3	55.00 kW	DN 125	536.0 kg	9139913
CronoBloc-BL 125/170-45/2	3~400 V, 50 Hz	IE3	45.00 kW	DN 125	484.0 kg	9139914
CronoBloc-BL 150/200-110/2	3~400 V, 50 Hz	IE3	110.00 kW	DN 150	1284.0 kg	9139921
CronoBloc-BL 150/190-90/2	3~400 V, 50 Hz	IE3	90.00 kW	DN 150	776.0 kg	9139922
CronoBloc-BL 150/180-75/2	3~400 V, 50 Hz	IE3	75.00 kW	DN 150	776.0 kg	9139923
CronoBloc-BL 32/170-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	DN 32	47.0 kg	2121071
CronoBloc-BL 32/210-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	DN 32	58.0 kg	2121072
CronoBloc-BL 32/220-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	DN 32	63.0 kg	2121073
CronoBloc-BL 40/160-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	DN 40	49.0 kg	2121074
CronoBloc-BL 40/170-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	DN 40	54.0 kg	2121075
CronoBloc-BL 40/210-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	DN 40	69.0 kg	2121076
CronoBloc-BL 40/220-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	DN 40	78.0 kg	2121077
CronoBloc-BL 50/160-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	DN 50	57.0 kg	2121081
CronoBloc-BL 50/170-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	DN 50	57.0 kg	2121082
CronoBloc-BL 50/170-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	DN 50	62.0 kg	2121083
CronoBloc-BL 50/200-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	DN 50	77.0 kg	2121084

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 50/220-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	DN 50	77.0 kg	2121085
CronoBloc-BL 50/220-3/4	3~400 V, 50 Hz	IE3	3.00 kW	DN 50	85.0 kg	2121086
CronoBloc-BL 50/250-3/4	3~400 V, 50 Hz	IE3	3.00 kW	DN 50	95.0 kg	2121087
CronoBloc-BL 50/250-4/4	3~400 V, 50 Hz	IE3	4.00 kW	DN 50	102.0 kg	2121088
CronoBloc-BL 50/270-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	DN 50	142.0 kg	2121089
CronoBloc-BL 65/150-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	DN 65	63.0 kg	2121090
CronoBloc-BL 65/160-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	DN 65	68.0 kg	2121091
CronoBloc-BL 65/170-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	DN 65	78.0 kg	2121092
CronoBloc-BL 65/210-3/4	3~400 V, 50 Hz	IE3	3.00 kW	DN 65	95.0 kg	2121093
CronoBloc-BL 65/220-4/4	3~400 V, 50 Hz	IE3	4.00 kW	DN 65	102.0 kg	2121094
CronoBloc-BL 80/150-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	DN 80	79.0 kg	2121096
CronoBloc-BL 80/160-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	DN 80	91.0 kg	2121097
CronoBloc-BL 80/170-3/4	3~400 V, 50 Hz	IE3	3.00 kW	DN 80	101.0 kg	2121098
CronoBloc-BL 80/200-3/4	3~400 V, 50 Hz	IE3	3.00 kW	DN 80	122.0 kg	2121099
CronoBloc-BL 80/200-4/4	3~400 V, 50 Hz	IE3	4.00 kW	DN 80	130.0 kg	2121100
CronoBloc-BL 80/220-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	DN 80	167.0 kg	2121101
CronoBloc-BL 80/250-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	DN 80	178.0 kg	2121102
CronoBloc-BL 80/250-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	DN 80	166.0 kg	2121103
CronoBloc-BL 80/270-11/4	3~400 V, 50 Hz	IE3	11.00 kW	DN 80	216.0 kg	2121104
CronoBloc-BL 100/145-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	DN 100	109.0 kg	2121105
CronoBloc-BL 100/150-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	DN 100	119.0 kg	2121106
CronoBloc-BL 100/160-3/4	3~400 V, 50 Hz	IE3	3.00 kW	DN 100	127.0 kg	2121107
CronoBloc-BL 100/170-4/4	3~400 V, 50 Hz	IE3	4.00 kW	DN 100	134.0 kg	2121108

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 100/180-4/4	3~400 V, 50 Hz	IE3	4.00 kW	DN 100	134.0 kg	2121109
CronoBloc-BL 100/200-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	DN 100	173.0 kg	2121110
CronoBloc-BL 100/220-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	DN 100	173.0 kg	2121111
CronoBloc-BL 100/220-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	DN 100	161.0 kg	2121112
CronoBloc-BL 100/250-11/4	3~400 V, 50 Hz	IE3	11.00 kW	DN 100	230.0 kg	2121113
CronoBloc-BL 100/270-15/4	3~400 V, 50 Hz	IE3	15.00 kW	DN 100	235.0 kg	2121114
CronoBloc-BL 40/225-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	DN 50	109.0 kg	2142010
CronoBloc-BL 40/240-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	DN 50	109.0 kg	2142011
CronoBloc-BL 40/240-3/4	3~400 V, 50 Hz	IE3	3.00 kW	DN 50	117.0 kg	2142012
CronoBloc-BL 40/265-3/4	3~400 V, 50 Hz	IE3	3.00 kW	DN 50	117.0 kg	2142013
CronoBloc-BL 40/265-4/4	3~400 V, 50 Hz	IE3	4.00 kW	DN 50	124.0 kg	2142014
CronoBloc-BL 65/240-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	DN 65	175.0 kg	2142023
CronoBloc-BL 65/265-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	DN 65	175.0 kg	2142024
CronoBloc-BL 65/265-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	DN 65	153.0 kg	2142025
CronoBloc-BL 100/305-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	DN 100	297.0 kg	2142026
CronoBloc-BL 100/315-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	DN 100	297.0 kg	2142027
CronoBloc-BL 100/315-22/4	3~400 V, 50 Hz	IE3	22.00 kW	DN 100	314.0 kg	2142028
CronoBloc-BL 100/330-22/4	3~400 V, 50 Hz	IE3	22.00 kW	DN 100	314.0 kg	2142029
CronoBloc-BL 100/330-30/4	3~400 V, 50 Hz	IE3	30.00 kW	DN 100	391.0 kg	2142030
CronoBloc-BL 100/345-22/4	3~400 V, 50 Hz	IE3	22.00 kW	DN 100	314.0 kg	2142031
CronoBloc-BL 100/345-30/4	3~400 V, 50 Hz	IE3	30.00 kW	DN 100	391.0 kg	2142032
CronoBloc-BL 125/185-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	DN 125	208.0 kg	2142033
CronoBloc-BL 125/210-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	DN 125	190.0 kg	2142034

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 125/225-11/4	3~400 V, 50 Hz	IE3	11.00 kW	DN 125	246.0 kg	2142035
CronoBloc-BL 125/245-15/4	3~400 V, 50 Hz	IE3	15.00 kW	DN 125	274.0 kg	2142036
CronoBloc-BL 125/265-15/4	3~400 V, 50 Hz	IE3	15.00 kW	DN 125	274.0 kg	2142037
CronoBloc-BL 125/265-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	DN 125	293.0 kg	2142038
CronoBloc-BL 125/275-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	DN 125	293.0 kg	2142039
CronoBloc-BL 125/275-22/4	3~400 V, 50 Hz	IE3	22.00 kW	DN 125	310.0 kg	2142040
CronoBloc-BL 150/250-30/4	3~400 V, 50 Hz	IE3	30.00 kW	DN 150	463.0 kg	2151502
CronoBloc-BL 150/240-22/4	3~400 V, 50 Hz	IE3	22.00 kW	DN 150	402.0 kg	2151503
CronoBloc-BL 150/230-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	DN 150	379.0 kg	2151504
CronoBloc-BL 150/220-15/4	3~400 V, 50 Hz	IE3	15.00 kW	DN 150	317.0 kg	2151505
CronoBloc-BL 150/210-11/4	3~400 V, 50 Hz	IE3	11.00 kW	DN 150	294.0 kg	2151506
CronoBloc-BL 125/295-30/4	3~400 V, 50 Hz	IE3	30.00 kW	DN 125	468.0 kg	2160679
CronoBloc-BL 125/285-22/4	3~400 V, 50 Hz	IE3	22.00 kW	DN 125	409.0 kg	2160680
CronoBloc-BL 125/275-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	DN 125	386.0 kg	2160681
CronoBloc-BL 150/285-30/4	3~400 V, 50 Hz	IE3	30.00 kW	DN 150	492.0 kg	2160692
CronoBloc-BL 150/275-22/4	3~400 V, 50 Hz	IE3	22.00 kW	DN 150	432.0 kg	2160693
CronoBloc-BL 32/250.1-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	DN 32	97.0 kg	9126701
CronoBloc-BL 32/240.1-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	DN 32	95.0 kg	9126702
CronoBloc-BL 32/230.1-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	DN 32	88.0 kg	9126703
CronoBloc-BL 32/220.1-0,55/4	3~400 V, 50 Hz	IE3	0.55 kW	DN 32	84.0 kg	9126704
CronoBloc-BL 32/125-0,55/4	3~400 V, 50 Hz	IE3	0.55 kW	DN 32	57.0 kg	9126706
CronoBloc-BL 32/115-0,37/4	3~400 V, 50 Hz	IE3	0.37 kW	DN 32	53.0 kg	9126707
CronoBloc-BL 32/105-0,25/4	3~400 V, 50 Hz	IE3	0.25 kW	DN 32	53.0 kg	9126708

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 40/125-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	DN 40	63.0 kg	9126711
CronoBloc-BL 40/115-0,55/4	3~400 V, 50 Hz	IE3	0.55 kW	DN 40	60.0 kg	9126712
CronoBloc-BL 40/105-0,37/4	3~400 V, 50 Hz	IE3	0.37 kW	DN 40	56.0 kg	9126713
CronoBloc-BL 40/95-0,25/4	3~400 V, 50 Hz	IE3	0.25 kW	DN 40	55.0 kg	9126714
CronoBloc-BL 50/125-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	DN 50	73.0 kg	9126716
CronoBloc-BL 50/115-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	DN 50	65.0 kg	9126717
CronoBloc-BL 50/105-0,55/4	3~400 V, 50 Hz	IE3	0.55 kW	DN 50	62.0 kg	9126718
CronoBloc-BL 50/95-0,37/4	3~400 V, 50 Hz	IE3	0.37 kW	DN 50	58.0 kg	9126719
CronoBloc-BL 65/125-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	DN 65	78.0 kg	9132647
CronoBloc-BL 65/115-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	DN 65	70.0 kg	9132648
CronoBloc-BL 65/105-0,55/4	3~400 V, 50 Hz	IE3	0.55 kW	DN 65	67.0 kg	9132649
CronoBloc-BL 150/200-15/4	3~400 V, 50 Hz	IE3	15.00 kW	DN 150	302.0 kg	9132651
CronoBloc-BL 150/190-11/4	3~400 V, 50 Hz	IE3	11.00 kW	DN 150	279.0 kg	9132652
CronoBloc-BL 150/180-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	DN 150	257.0 kg	9132653
CronoBloc-BL 125/315-45/4	3~400 V, 50 Hz	IE3	45.00 kW	DN 125	553.0 kg	9135339
CronoBloc-BL 125/305-37/4	3~400 V, 50 Hz	IE3	37.00 kW	DN 125	572.0 kg	9135340
CronoBloc-BL 125/380-55/4	3~400 V, 50 Hz	IE3	55.00 kW	DN 125	844.0 kg	9135341
CronoBloc-BL 125/400-90/4	3~400 V, 50 Hz	IE3	90.00 kW	DN 125	914.0 kg	9135342
CronoBloc-BL 125/370-45/4	3~400 V, 50 Hz	IE3	45.00 kW	DN 125	614.0 kg	9135343
CronoBloc-BL 125/390-75/4	3~400 V, 50 Hz	IE3	75.00 kW	DN 125	874.0 kg	9135344
CronoBloc-BL 125/360-37/4	3~400 V, 50 Hz	IE3	37.00 kW	DN 125	633.0 kg	9135345
CronoBloc-BL 150/315-55/4	3~400 V, 50 Hz	IE3	55.00 kW	DN 150	809.0 kg	9135346
CronoBloc-BL 150/305-45/4	3~400 V, 50 Hz	IE3	45.00 kW	DN 150	577.0 kg	9135347

Product list: Wilo-CronoBloc-BL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Nominal flange diameter	Gross weight, approx. m	Article number
CronoBloc-BL 150/295-37/4	3~400 V, 50 Hz	IE3	37.00 kW	DN 150	596.0 kg	9135348
CronoBloc-BL 32/160-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	DN 32	43.5 kg	2089365
CronoBloc-BL 32/150-0,37/4	3~400 V, 50 Hz	IE2	0.37 kW	DN 32	38.5 kg	2089367
CronoBloc-BL 40/150-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	DN 40	45.5 kg	2089384